



常规系列 (General purpose) DJM12225(12V225Ah)




规格 Specifications

额定电压	Rated Voltage			12V
标称容量	Nominal Capacity (C ₁₀ , 1.80V/cell)			225Ah
尺寸	Dimension	长	Length	522±2mm (20.55 in.)
		宽	Width	240±2mm (9.45 in.)
		高	Container Height	218±2mm (8.58 in.)
		总高(含端子)	Total Height	224±2mm (8.82 in.)
重量	Approx Weight			64.5kg (142.20 lbs)
端子	Terminal			M8
外壳材料	Container Material			ABS
额定容量	Rated Capacity (25°C)	238.0 Ah	C20(11.9A, 1.80V/cell)	
		225.0 Ah	C10(22.5A, 1.80V/cell)	
		197.0 Ah	C5(39.4A, 1.75V/cell)	
		178.8 Ah	C3(59.6A, 1.75V/cell)	
		144.0 Ah	C1(144.0A, 1.67V/cell)	
5S最大放电电流	Max. Discharge Current			2250A (5s)
内阻	Internal Resistance (25°C)			Approx 2.8mΩ
运行温度	Operating Temp.Range	放电	Discharge	-20 ~ 55°C (-4 ~ 131°F)
		充电	Charge	0 ~ 40°C (32 ~ 104°F)
		存储	Storage	-15 ~ 50°C (5 ~ 122°F)
推荐温度	Nominal Operating Temp. Range			25±5°C (77±5°F)
最大充电电流 (25°C)	Max.Charging Current			67.5A
充电电压 (25°C)	Charge voltage	浮充	Float	13.5~13.8V
		温度补偿	Temp. Coefficient	-3mV/单格/°C
		循环(均充)	Cycle(Equalization)	14.1~14.4V
温度对容量影响	Effect of temp. to Capacity	40°C (104°F)	106%	
		25°C (77°F)	100%	
		0°C (32°F)	86%	
自放电	Self Discharge			≤3%/月 @ 25°C



外形 Layout

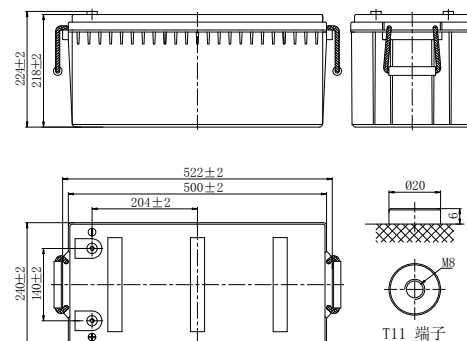

恒流放电表(A) 25 °C Constant Current Discharge

F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	468.3	349.6	291.2	244.7	188.1	140.3	118.6	88.9	71.2	53.7	42.8	35.7	31.0	25.2	21.1	11.3
1.80V/cell	545.9	412.2	338.6	281.9	212.6	156.9	131.2	97.3	77.4	58.1	46.1	38.5	33.3	27.0	22.5	11.9
1.75V/cell	595.7	442.0	358.2	295.8	222.2	163.3	136.1	100.6	79.8	59.6	47.3	39.4	34.0	27.5	22.8	12.1
1.70V/cell	645.2	471.4	378.5	311.3	232.0	169.5	141.1	104.0	82.4	61.4	48.4	40.3	34.7	28.0	23.2	12.2
1.67V/cell	673.6	488.7	390.5	320.1	237.9	173.3	144.0	105.8	83.7	62.3	49.1	40.8	35.1	28.3	23.4	12.3
1.60V/cell	742.5	528.8	418.5	340.9	251.3	182.3	151.0	110.5	87.2	64.6	50.7	42.0	36.1	28.9	23.9	12.5

恒功率放电表(W) 25 °C Constant Power Discharge

F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	889.8	669.2	559.4	471.4	363.5	272.1	230.4	173.4	139.1	105.2	84.0	70.4	61.2	49.8	41.7	22.5
1.80V/cell	1021.5	779.6	643.7	538.0	407.5	302.0	253.3	188.6	150.6	113.4	90.3	75.6	65.5	53.2	44.5	23.7
1.75V/cell	1097.7	825.8	673.8	559.1	422.3	311.9	260.8	193.8	154.3	115.9	92.2	77.0	66.6	54.1	45.1	24.0
1.70V/cell	1169.5	869.1	704.1	582.5	436.9	321.2	268.5	199.1	158.4	118.8	94.2	78.6	67.9	54.9	45.7	24.3
1.67V/cell	1209.4	894.0	728.2	595.2	445.5	326.8	272.8	201.9	160.5	120.2	95.2	79.4	68.6	55.4	46.1	24.4
1.60V/cell	1299.4	947.6	759.7	623.8	464.7	340.0	283.4	209.2	166.0	123.9	97.9	81.4	70.2	56.6	46.9	24.8



常规系列 (General purpose) DJM12225(12V225Ah)



应用 Applications

- 通讯
Telecommunications
- UPS、数据中心
UPS、Data Center
- 储能、电力
Energy Storage、Electric Systems
- 紧急照明、安防
Emergency Lighting、Security
- 医疗、电子设备
Medical、Electronic Equipment
- 动力
Motive Power


特征 General Features

- 25°C下, 设计浮充寿命可达12年。
Under 25°C, the designed floating life is up to 12 years.
- 特殊的排气结构和密封技术, 使用安全可靠, 安装灵活, 维护便捷。
Special exhaust structure and sealing technology, safe and reliable, flexible installation, convenient maintenance.


标准 Standards

- 符合IEC 60896, GB/T19638, YD/T 799 和DL/T 637标准
Compliance with IEC 60896, GB/T19638, YD/T 799 and DL/T 637 standards
- UL 认证, 泰尔认证
UL Certified, TLC Certified
- 企业通过了IATF16949, OHSAS 18001, ISO 9001和ISO 14001体系认证
Manufactured in Leoch@IATF16949, OHSAS 18001, ISO 9001 and ISO 14001 certified production facilities


放电特性曲线 Discharge Characteristics

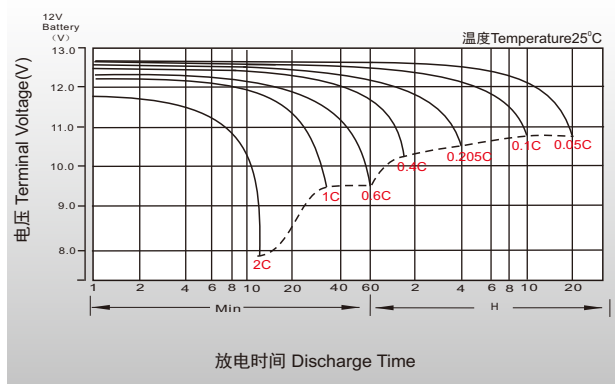

浮充特性曲线 Float Charging Characteristics

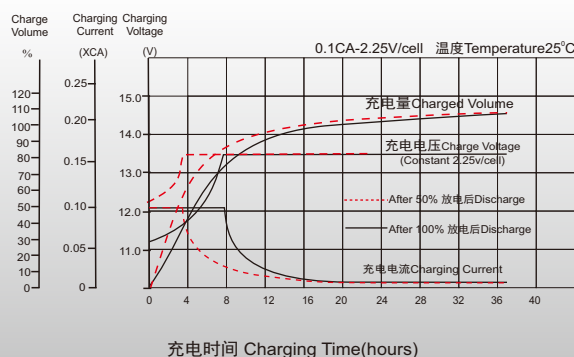

温度对容量影响 Temperature Effects in Relation to Battery Capacity

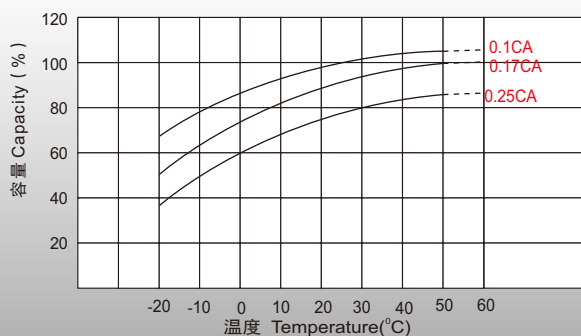

温度对浮充寿命影响 Temperature Effects on Long Term Float Life

